

INSTALLATION TIPS

CARE + MAINTENANCE

Avoid acetone silicones upon installation, harsh chemicals and abrasive cloths when cleaning (as these will scratch the chrome surface), waxed based furniture creams (as these can result in a build up of deposits and may detract from the appearance). Clean using a soft soapy cloth and polish with a dry soft cloth and do not use undue pressure whilst cleaning. Ensure all new installations are fully flushed prior to installing the ceramic headparts to prevent any possible damage to the product and voiding of the warranty.

LICENCED PLUMBER / INSTALLER

This water saving range of tapware and outlets have been fitted with flow restrictors which can create greater hydrostatic back pressure to the ceramic cartridge.

Always flush water inlet lines on new installations before fitting tapware to avoid damage to ceramic valve.

Please Note:

- These tapware sets contain ceramic disc 180° turn spindles.
- Product not installed by a licensed plumber or in accordance with relevant industry standards and regulations may void the manufacturers warranty terms & conditions.

Please ensure the operating pressure to all points in the building conforms to AS/NZS 3500.1 and does not exceed 500KPA .

Failure to limit the operating flow pressure, may void the warranty on this fixture.

PRESSURE + TEMPERATURE REQUIREMENTS

Ensure operating water pressure is between 1-5 bar (100-500Kpa).

If pressure is in excess of 500Kpa fit pressure reduction valve to ensure installation conforms to AS/NZ 3500.1

This tapware set is not recommended for use with low pressure gravity feed water systems.

Maximum hot water temperature 80°C.

WARRANTY

All Argent products are covered by a three (3) year warranty from the date of purchase. Argent will undertake to rectify free of charge for parts and labour, within this period any fault due to defects in materials or workmanship. Regardless of interim service within that period, the warranty shall expire after three (3) years from the date of original purchase.

Finishes

All Argent finishes are warranted against chipping and flaking, excluding normal wear and tear for three (3) years from date of purchase.

Headparts

All Argent replacement headparts will only be covered by warranty if the fault can be clearly shown to have existed as a result of defect in manufacture. There is a twelve (12) month warranty period only applicable for these replacement parts.

Exclusions

This warranty is for normal domestic and commercial use only and excludes any defect or injury caused by or resulting from misuse, abuse or neglect, accidental damage, improper installation or installation by unlicensed plumber, products not installed to relevant National Standards and State Regulations.



Brisbane

Level 3 / 18 Wandoo Street
Fortitude Valley QLD 4006

Sydney

80 Abercrombie Street
Chippendale NSW 2008

Melbourne

206-208 Coventry Street
South Melbourne VIC 3205

Perth

Unit 1 / 40 Collingwood Street
Osborne Park WA 6017

Technical Advice

1300 356 717

Fax

1300 656 057

www.argentaust.com.au

Australian Design Registration


AUST. DES. REGN. NO. 3055590
AUST. DES. REGN. NO. 307308
AUST. DES. REGN. NO. 307309

ARG-001-250_Inline Qube WallStop&Set V3.0




Qube Wall Stop Qube Wall Sets

INSTALLATION INSTRUCTIONS




106355

Qube Bath Wall Set



111055

Qube Wall Stops



105355

Qube Basin Wall Set 5Lpm



WELS 5 star rated
Nominal flow rate 5Lpm

MEASURE

PLEASE NOTE: Before starting any work use Depth Ruler or tape measure to ensure that the distance from the front of the combination to the finished wall surface is between 8 & 30mm.

PREPERATION

In wall combination is supplied by registered plumber/ installer. Ensure tap seat has a uniform smooth flat surface, square to the tap body face. If seat is worn reset using a parallel thread tap reseater. Hydroseal® brand recommended.

NOTE: Head part supplied. Ceramic Disc Cartridge .For use in tap bodies made to Australian Standard AS3718.


IMPORTANT!

1. Do one complete wall stop first and test on your installation before cutting them both in case any additional adjustment is required. One spare Grey thermal barrier is supplied.
2. Make sure that the Grey thermal barrier is cut as true as practical
3. Remove any swarf from the cut with a mild file.
4. Use a file to create a taper on the cut thread.

MEASURE & CUT

See figure A

1. Now you have established the measurement required for this wall stop set, you can start the installation process. Go to the Assembly Table for cut recommendations. You may need to trim either or both of the following items, part (A) and part (I)

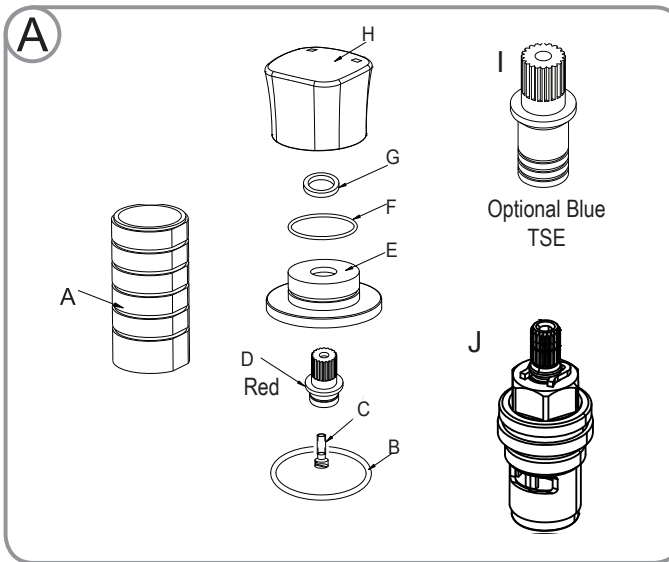

FINAL ASSEMBLY

See figure B

2. Measure the distance between the in wall combination / in wall tap body, and the finished wall surface. Use this distance to calculate the correct length of the grey thermal barrier (A) based on measurements in the Assembly Table
3. Cut the thermal barrier to the length indicated in the Assembly Table ensuring that the distance is calculated from the end with the internal thread that attaches to the headpart.
4. Using a mild file, clean up the cut on the grey thermal barrier, making sure the thread is clean and the cut is flat.
5. Screw both head parts provided (J) into the in-wall tap body (combination) firmly. Ensure red fibre washer is on the headpart in the correct position.
6. Before you fit the cut grey thermal barriers, test fit the assembled flange over head part to ensure the splines will engage, a minimum of 5mm engagement is required.

7. Attach the grey thermal barriers to the flange (E) **Cut one set 1st and test this before cutting both incase some adjustment is necessary. One spare grey thermal barrier supplied.**

8. Reassemble the flange assembly. If the Assembly table recommends using the longer spline extension, part (I), re-lubricate the 'O' ring (G) Shown in table A.


9. Holding the handle in the off position so it doesn't move, wind flange until it firmly touches the finished wall. Handle is in the off position when the symbols are horizontal and facing outwards See figure B

10. If there is a noticeable gap between the back of the flange and the finished wall, recheck the Assembly Table recommendations and cut positions for accuracy. Also check if there is more than 15mm of the grey thermal barrier exposed and check the thermal spline extension is the correct one specified.

11. Use the blue rubber flange installation ring provided to protect the base of the flange from damage, before tightening with a suitable tool.

NOTE

Water Pressure; Refer AS/NZS 3500.1.2003 – Clause 3-3.4 "Provision shall be made to ensure that the maximum operating pressure at any outlet other than a fire service, within a building does not exceed 500KPA"

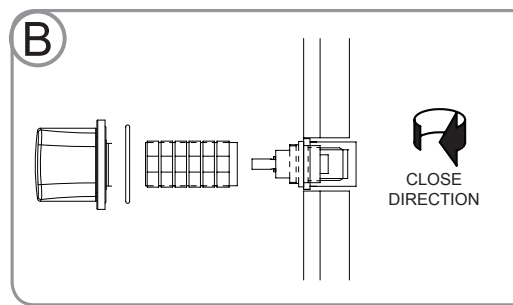


ASSEMBLY TABLE

Depth Measurement – finished wall to face of combination / in wall tap body	Length of Grey Thermal Barrier (A) - cuts required from internal thread end	Thermal spline extension (Red) –replace with Blue and cut as required below
8mm	17mm	Remove Red TSE & cut at 2nd groove from internal spline end.
9mm	18mm	Remove Red TSE & cut at 2nd groove from internal spline end.
10mm	19mm	Remove Red TSE & cut at 2nd groove from internal spline end.
11mm	20mm	Remove Red TSE & cut at 2nd groove from internal spline end.
12mm	21mm	Remove Red TSE & cut at 2nd groove from internal spline end.
13mm	22mm	Remove Red TSE & cut at 1st groove from internal spline end.
14mm	23mm	Remove Red TSE & cut at 1st groove from internal spline end.
15mm	24mm	Remove Red TSE & cut at 1st groove from internal spline end.
16mm	25mm	Remove Red TSE & cut at 1st groove from internal spline end.
17mm	26mm	Use assembled wall stop as is – no change required
18mm	27mm	Use assembled wall stop as is – no change required
19mm	28mm	Use assembled wall stop as is – no change required
20mm	29mm	Use assembled wall stop as is – no change required
21mm	30mm	Use assembled wall stop as is – no change required

IMPORTANT!

If the combination/ in wall pipe work has a depth greater than 21mm to 30 mm, these wall taps can be installed by using the optional Blue thermal spline extension, Part # 111507, additionally where the depth is less than 8mm, an optional stackable 5mm trouble dome/s are available, Part # 111500 sold as single units.



Thermal Spline Extension TSE Blue (I) QTY 2

CUTTING TEMPLATE

