

Argent Evoke Back to Wall Smart Toilet



**INSTALLER - READ
BEFORE INSTALLING**

Installation Manual:
SBTW200

 **Argent**
Villeroy & Boch Group

Table of Contents

Safety Precautions	5
Installation Precautions	6
Electrical Requirements.	7
Set Out Instructions.	8
Tools Required.	9
Bill of Materials	10
Pan & Seat Installation	12
Remote Installation	25
Installer Final Check List	27
Contact	28



The supplier accepts no liability for any loss resulting from failure to comply with the following regulations:

This equipment is a Class I electrical appliance and must be connected to an earthed system.

As an electrical appliance, it must not be installed in areas where it may be exposed to water splashes or high temperatures. Adequate ventilation must be ensured by installing an exhaust fan or ventilation opening in the space.

If the power supply cord is damaged, it must be replaced by the manufacturer, an authorised service agent, or a similarly qualified professional to prevent potential hazards.

Smart Toilet Seat

Model: SBTW200

Rated Voltage	220V
Rated Frequency	50Hz
Rated Power	980W
Waterproof	IPX4
Anti-Electric Shock Type	1

Technical Information	
Power Supply	AC220 - 240, 50-60Hz
Power Wattage	980W
IP Rating	IPX4
Note: All electrical work connected to this product must be installed by a qualified person, in accordance to AS/NZS 3000 Wiring Rules.	
Certification	
WaterMark	AS1172.1 & AS1172.2 Certificate no: WMK25760
WELS	4 star 3 / 4.5L
RCM	

Safety Precautions

Please read this manual carefully before installing or using the product, and retain it for future reference. Improper use or negligence may result in serious injury.

The Evoke Smart toilet must not be used by individuals (including children) who lack the experience or knowledge to operate it safely, unless they are supervised by a responsible person or have been instructed on its proper use.

Children must not play with the unit.

When using electrical devices, always follow basic safety precautions. Specific guidelines are outlined below.

Explanation of Symbols

DANGER

Indicates a potentially hazardous situation that could result in serious injury or death.

NOTICE

Indicates a potentially hazardous situation that could result in injury or damage to property.

STRICTLY REQUIRED

Indicates that the specified rules or instructions must be followed.

Installation Precautions



STRICTLY REQUIRED

This product should only be installed by a qualified person and with provided components. Check the installation manual for more installation particulars.

1. Pre-Installation Precautions
2. Please observe the following guidelines before installing the Evoke Smart Toilet:
3. Connect the Evoke Smart Toilet only to the domestic cold water mains supply.
4. Do not use rainwater or greywater. The unit must be supplied with potable (drinking-quality) water only.
5. Flush the water outlet pipe thoroughly before connecting it to any fittings.
6. Ensure the water supply pressure remains within the recommended range of 250 kPa to 500 kPa.
7. Confirm the product is properly earthed.
8. Installation must comply with AS/NZS 3500.
9. Check with your local council to ensure all local plumbing regulations and requirements are met.


Note: This product has an air gap approved to AS2845 and AS/NZS 3500.1:2018. Therefore, further backflow prevention device (e.g. RPZ valve) is not required. There is a chance some water authorities request a CONTAINMENT high hazard backflow device at the meter, check prior to installation.

Electrical Requirements



STRICTLY REQUIRED

1. The electrical components of the Evoke Smart Toilet must be protected by a 10A RCD and a 10A circuit breaker. Both devices must be installed outside the bathroom.
2. A fixed power connection must be made using a dedicated flexible cable with three conductors (active, neutral and earth) of at least 1mm² cross-sectional area. The connection must be housed within a junction box rated IPX4 or higher. Replacement of the power cable, if required, must be carried out by a qualified professional.
3. It is also recommended for a power switch on the new circuit be available in the bathroom for customer convenience.

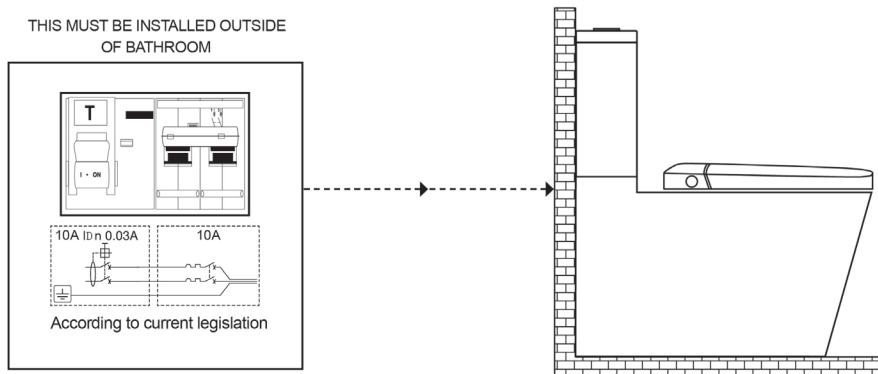

Note:

Any electrical work conducted on this product must be installed by a qualified person in accordance with AS/NZ 3000 Wiring Rules.

Please consult with a qualified electrician to confirm an appropriate installation location. No additional electrical equipment should be fitted inside the WC.

This product (IPX4) shall not be exposed to water jets for cleaning purposes.

Set Out Instructions

Before installing the pan make sure water outlet and power has been installed in the correct area.




DANGER

These operations should be performed by qualified service personnel.


Waste Outlet

The standard set out for a S-Trap is 100-250mm.



All distances are from final floor or finished wall.

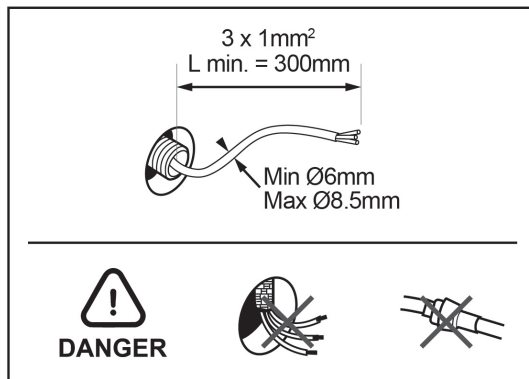


Water Supply
To be fitted with 1/2" BP Wall Elbow (plumber to supply & install). Allow 90mm of thread.

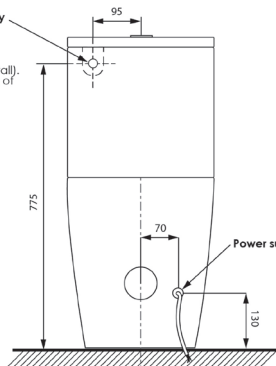

Power supply

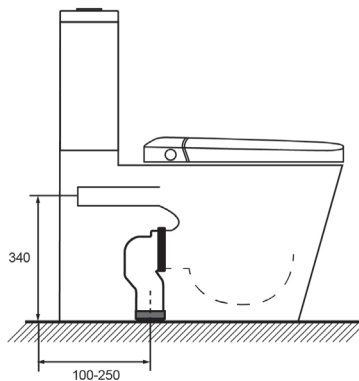


Tools Required




Tape Measure




Marker



**Philips Head
Screwdriver**



**Flat Head
Screwdriver**




Knife




File




Adjustable Wrench



Wire Strippers



Drill



Hacksaw




Ruler



Sealant

Bill of Materials





Pan & Seat



Installation Manual




Operation Manual




Remote and Holder




Electircal Connector




Dual Check Valve




S-Trap Pan Connector

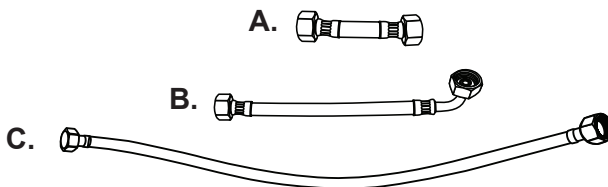


Flex Hoses



T-Piece




Donut Seal

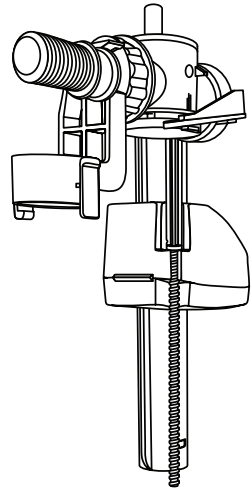

Inlet Valve




Flush Button




2x Top Fix Kit




Outlet Valve



Flow Tube



Stop Valve

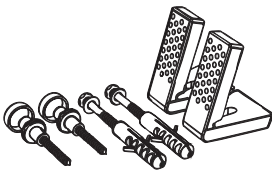

Floor Fixings


Seat & Pan Installation




DANGER

These operations should be performed by qualified service personnel.


1. Prepare set out.

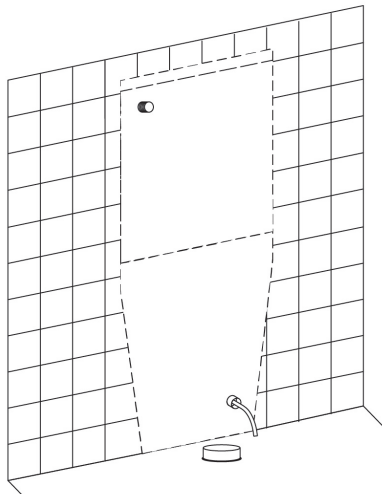


2. Install Varion Bend.

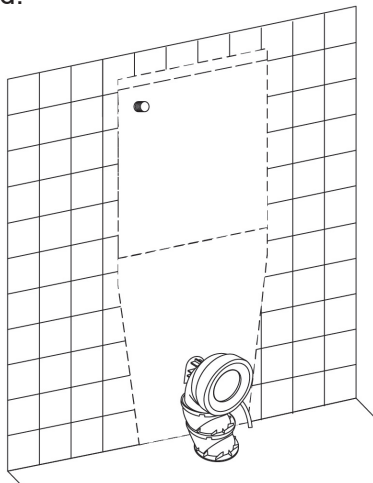


3. Uninstall the seat from the pan.

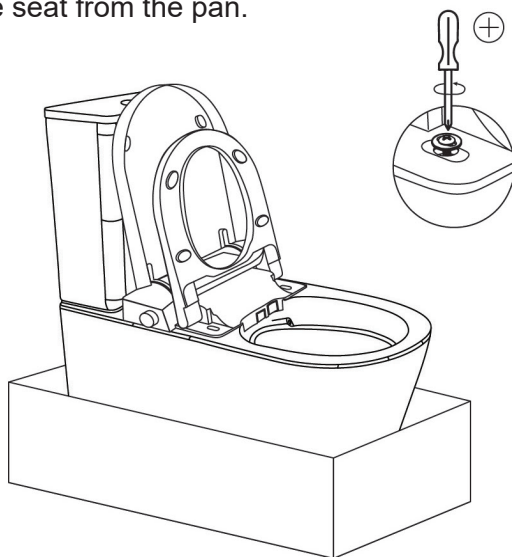


4. Remove the seat from the pan.

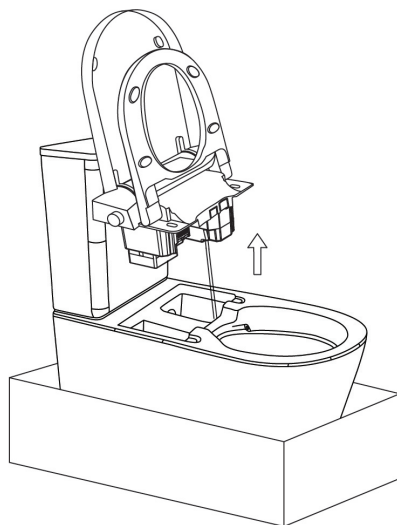


- 5.** Install plastic top fix screw to the pan.

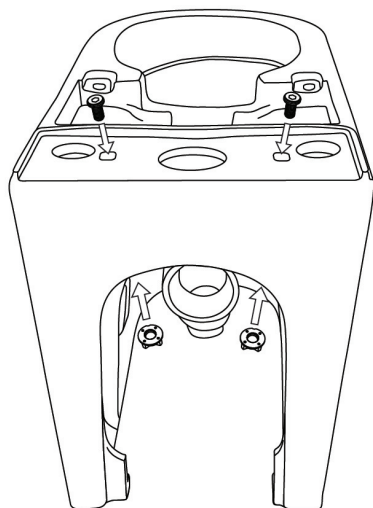


- 6.** Install the pan against the wall ensuring vairo is connected.

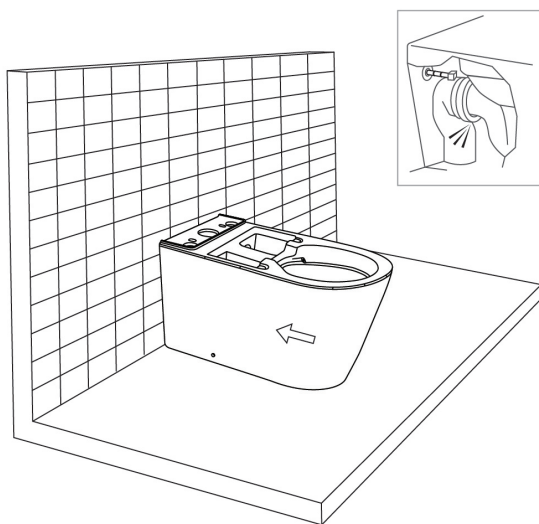


7. Ensure there are no leaks after connected.

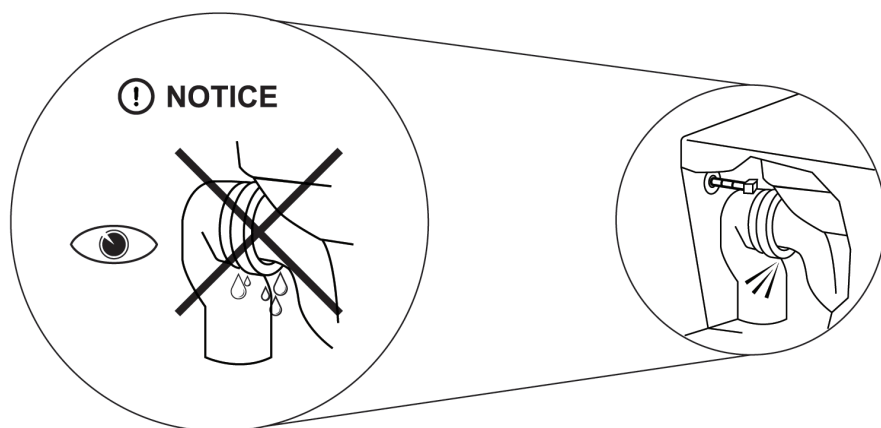


8. Install non-return valve.

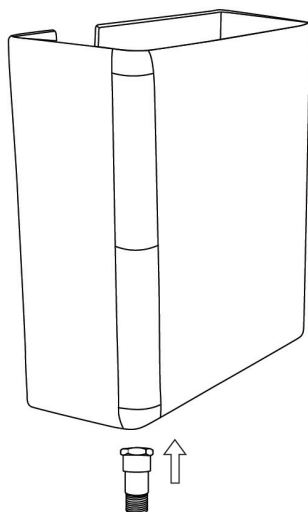


9. Install long flex hose (C).

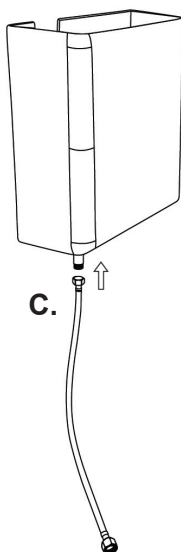


10. Install cistern ensuring the donut seal is located correctly.

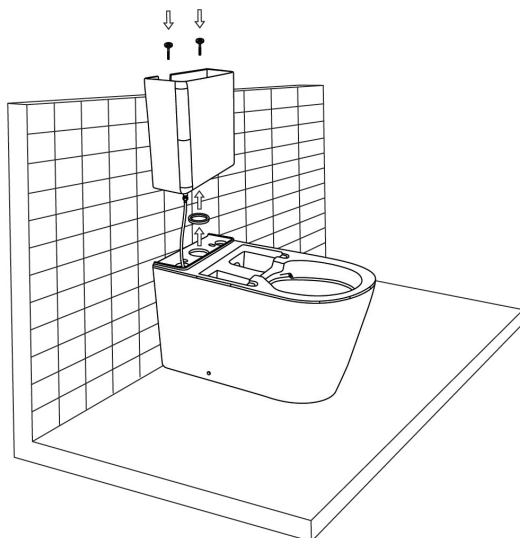


- 11.** Install the screws securing the cistern to the pan. Ensure the screws are tightened all the way to ensure best fit.

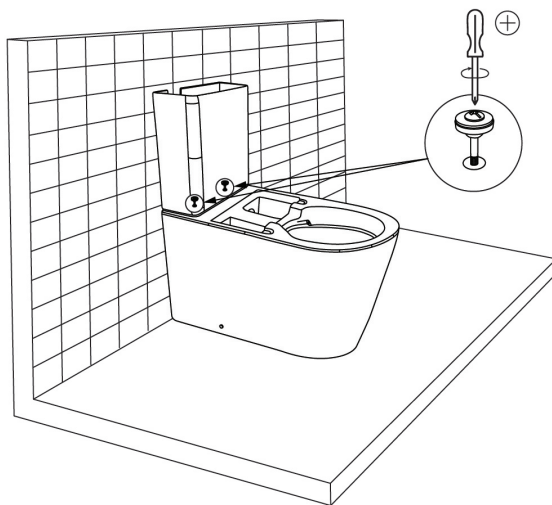


- 12.** Connect the small flex hose to the T-piece, then connect the medium flex hose to the T-piece and the stop valve to the other end.

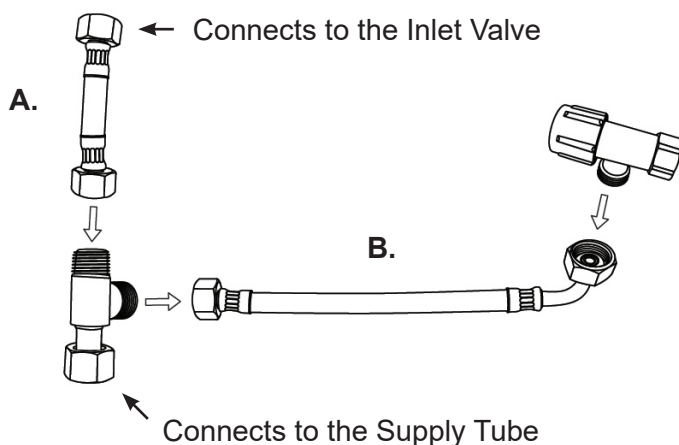


- 13.** The stop tap & T-piece is to be positioned as below for ideal alignment. Thread seal tape (PTFE) may be required to assist positioning the T-piece correctly. Ensuring the medium hose (B) is not kinked.

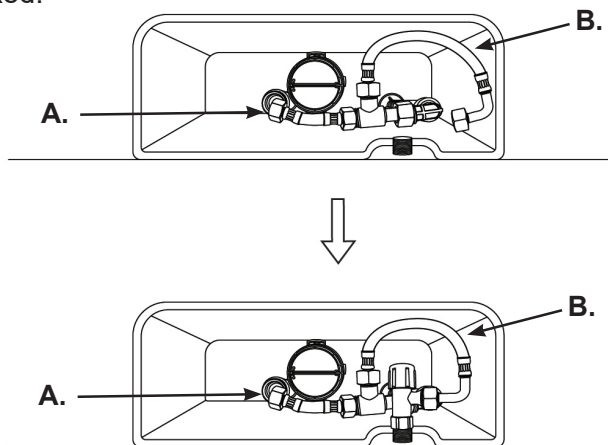


- 14.** Install inlet valve onto overflow tube of the outlet valve connecting the small hose (A).

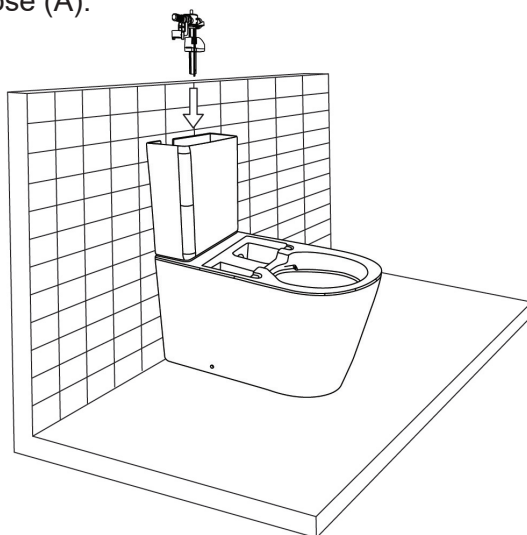


15.

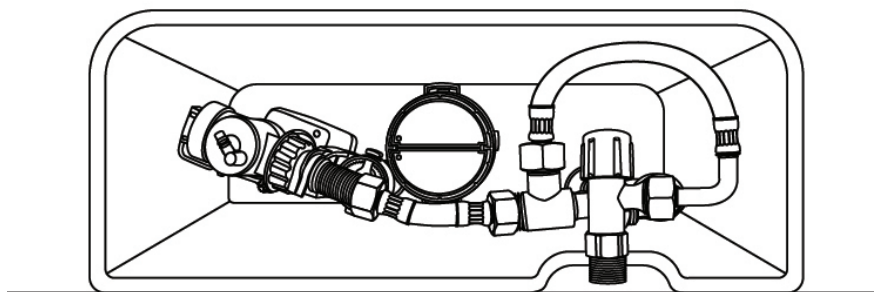


16.

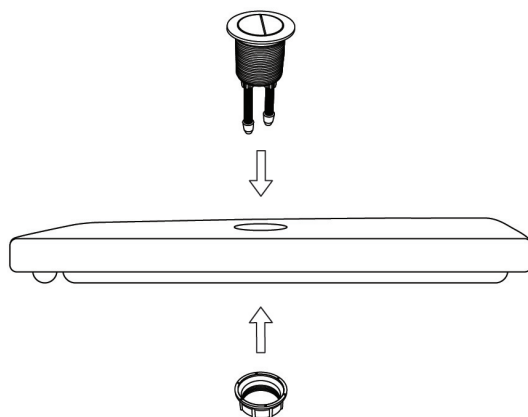


17.

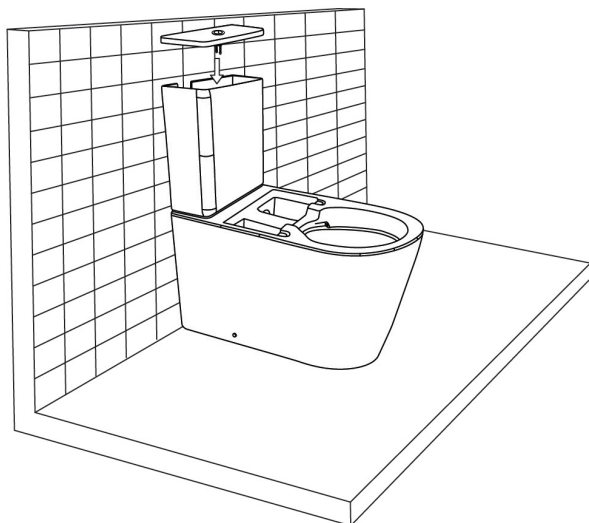


18.

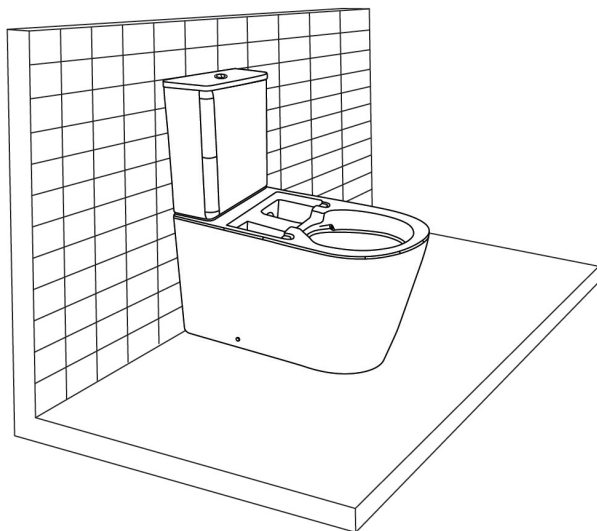


19. Finalise floor fixings and silicone in place.

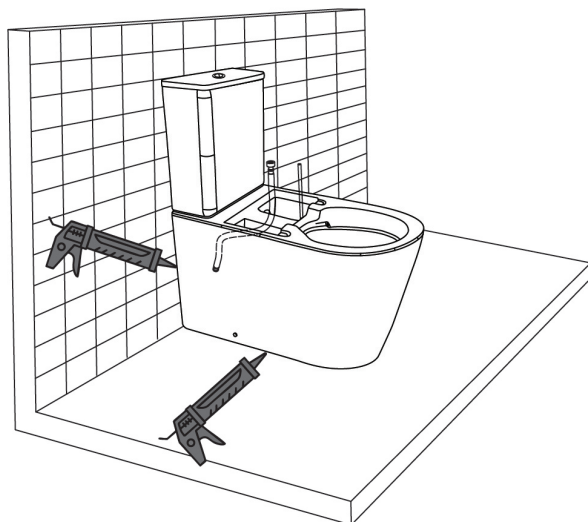


20. Electrical connections should be prepared by certified trade.

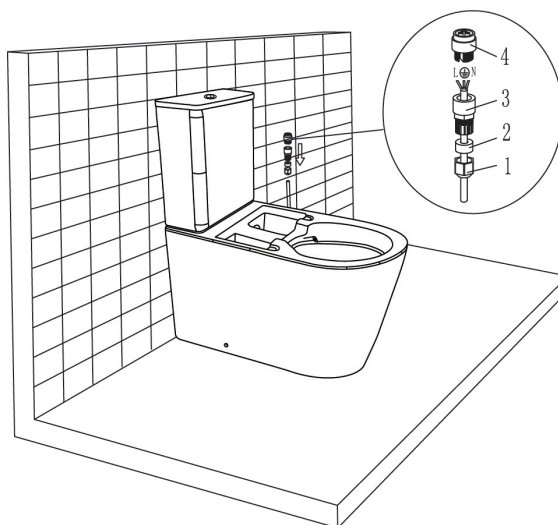


- 21.** Connect water, electrical and foot sensor. Third cable connection not required, this is a function not in Australia.

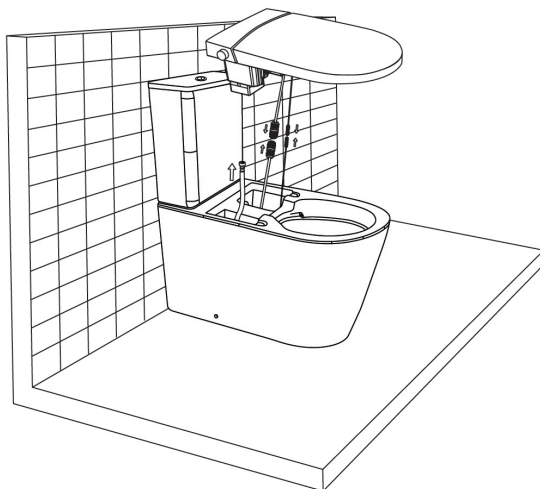


- 22.** Turn valve on in the cistern to provide water to the seat, ensuring all connections are secure and there are no leaks.

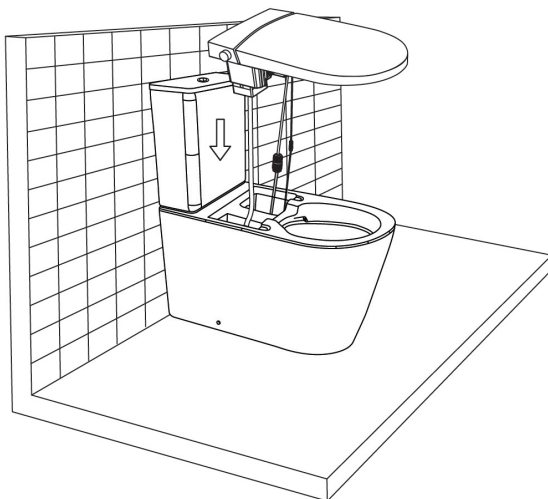


- 23.** Carefully install the seat ensuring the hose and cables are fed back into the pan to prevent kinking. Make sure the seat is secure and fits snugly.

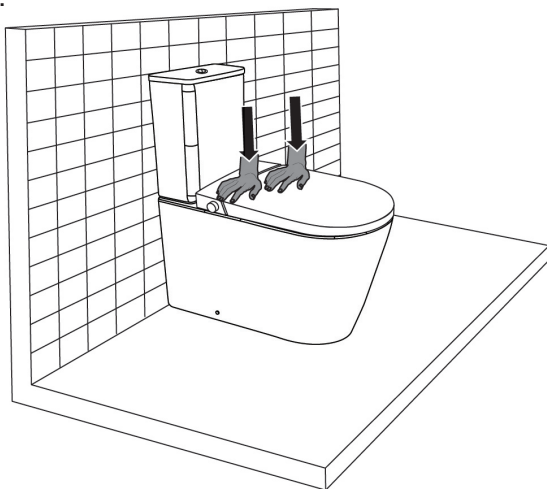


- 24.** Reinstall the seat to the pan with screws.

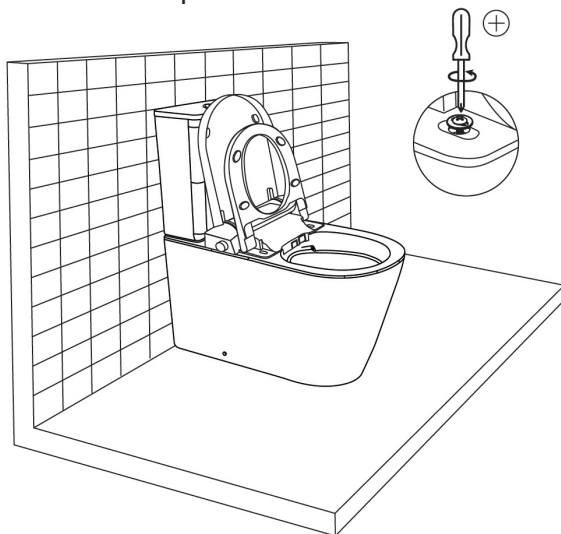

25. Cover the screws with the clips provided.

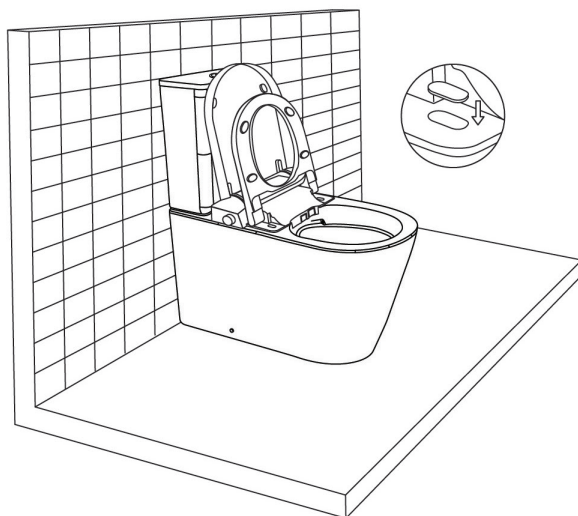


26.

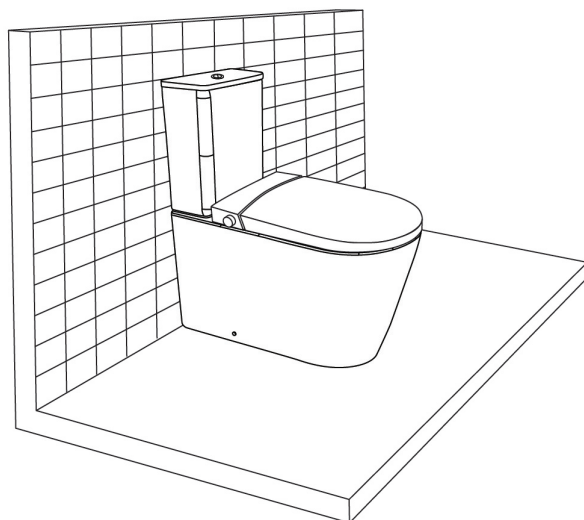


Remote Installation

Option 1


1.

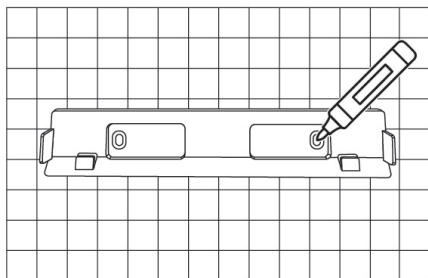


2.

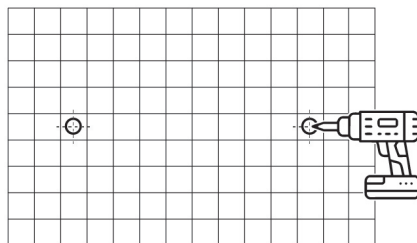


3.

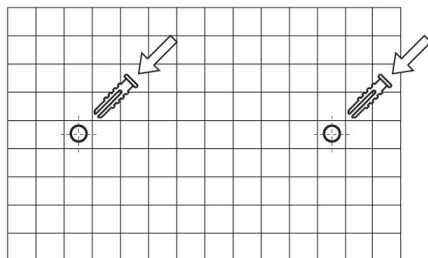





4.

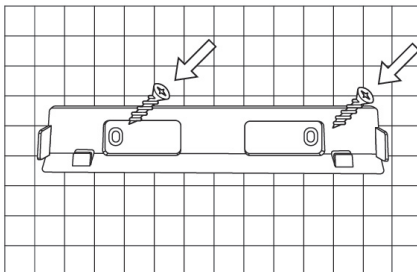

5.

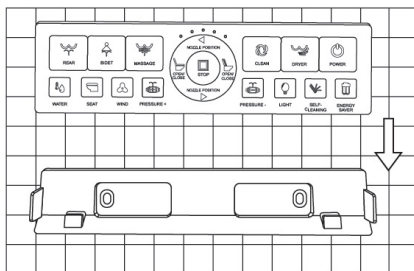

Option 2

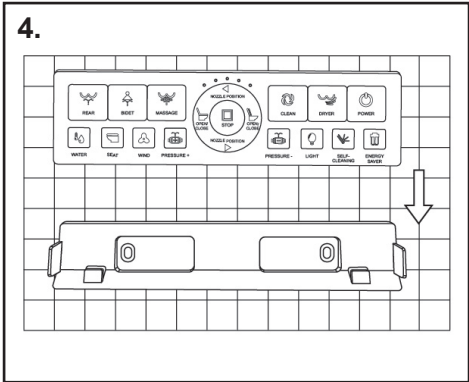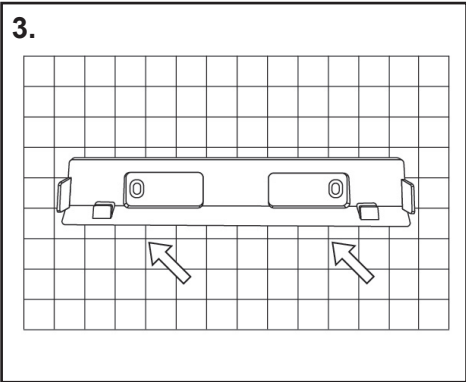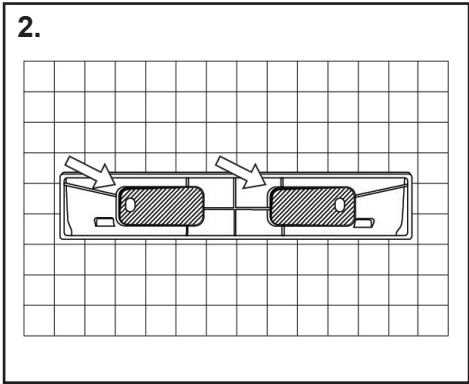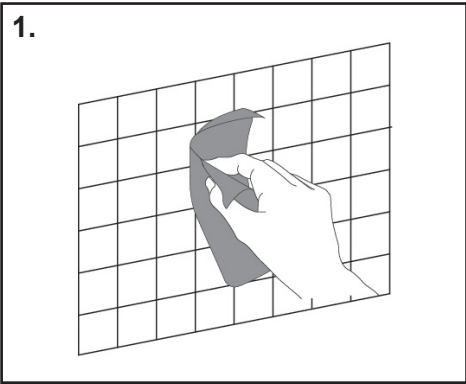

Installer Final Check List



NOTICE

Important steps to check before handover.

1. Ensure no leaks from Ball valve/hose connections.
2. Ensure no leaks from flushing cistern.
3. Check water supply to smart seat is functional.
 - a. Open seat cover, Using couple layers of cling wrap over the seat, place hand on body sensor location and activate a cleansing function (Rear or Bidet on remote).
 - b. Wand should extend and provide cleansing spray, if water does not come out, recheck installation and ensure all valves are open, and that the hose has not kinked reducing water supply.

Please leave the instructions and operation manual with the owner.

Please direct any questions or feedback for this product to Argent Central:
support@customer-central.com.au or call 1300 364 748

The manufacturer reserves the right to make alterations without notice.



Argent Australia
L1/22 Arthur Street, Fortitude Valley QLD 4006
1300 364 748
www.argentaust.com.au