

### SR205133 ARC 700MM SHOWER RAIL SET 9LPM – OVAL RAIL 30 X 15MM

#### NOTES PRIOR TO INSTALLATION


1. INSPECT ALL PARTS PRIOR TO INSTALLATION FOR SUITABILITY AND/ OR DEFECTS
2. ANY SUSPECTED DEFECT SHOULD BE REPORTED AS SOON AS POSSIBLE
3. SHOULD ANY PRODUCT BE INSTALLED DESPITE A FAULT HAVING BEEN FOUND AND REPORTED, ARGENT WILL NOT ACCEPT LIABILITY FOR THE COST OF LABOUR TO REMOVE AND INSTALL ANY REPLACEMENT PRODUCT/S

#### COMPONENT CHECK LIST

- A. 700mm Oval rail with slide and wall mount brackets
- B. Three function handpiece
- C. 1500mm gloss Silverflow Shower hose
- D. Wall Union elbow
- E. Bag of fittings, screws and wall plugs

#### INSTALLATION

1. Mark and drill shower rail holes as per dimension
2. Remove wall mount brackets from rail by loosening the grub screw, 2mm Allen key required
3. Secure the wall mount brackets to the wall
4. Attach the rail to the wall mount brackets, fasten the grub screw
5. Attach wall union elbow to the supply pipe
6. Connect hose and handpiece to the rail set and wall union elbow
7. Clean any packaging or installation debris from the site

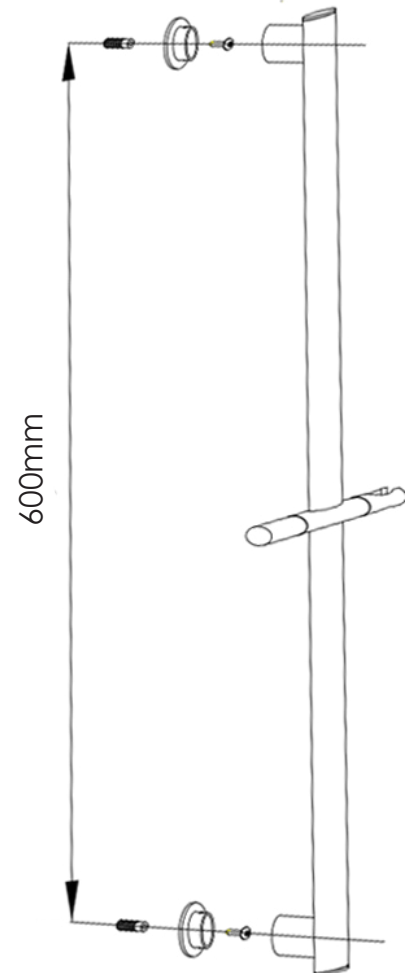

Please direct any feedback for this product to Customer Central:  
support@customer-central.com.au or call 1300 364 748



#### IMPORTANT

Pressure and Temperature requirements.

- Inlet pressure range 100 – 500kpa
- Maximum hot water temperature 60 C
- AS/NZS 3500 requires 500 kPa maximum operating pressure at any outlet within a building