

ARGENT COMBINATION SHOWER 9LPM

NOTES PRIOR TO INSTALLATION

1. INSPECT ALL PARTS PRIOR TO INSTALLATION FOR SUITABILITY AND/ OR DEFECTS
2. ANY SUSPECTED DEFECT SHOULD BE REPORTED AS SOON AS POSSIBLE
3. SHOULD ANY PRODUCT BE INSTALLED DESPITE A FAULT HAVING BEEN FOUND AND REPORTED, ARGENT WILL NOT ACCEPT LIABILITY FOR THE COST OF LABOUR TO REMOVE AND INSTALL ANY REPLACEMENT PRODUCT/S

IMPORTANT

1. Minimum height to ceiling from water entry point 500mm

PRESSURE AND TEMPERATURE REQUIREMENTS



1. Inlet pressure range 100 – 500kpa
2. Maximum hot water temperature 60 C
3. AS/NZS 3500 requires 500kpa maximum operating pressure at any outlet within a building

COMPONENT CHECK LIST

1. Combination Shower rail with slide and wall mount brackets
2. Three function handpiece
3. 1500mm gloss Silverflow Shower hose
4. Overhead Shower
5. Bag of fittings, screws and wall plugs

INSTALLATION

1. Attach Combination Shower adaptor to water entry point
2. Slide the Combination Shower rail over the installed adaptor, fasten the grub screws
3. Connect the overhead shower, handpiece and hose to the Combination Shower
4. Clean any packaging or installation debris from the site

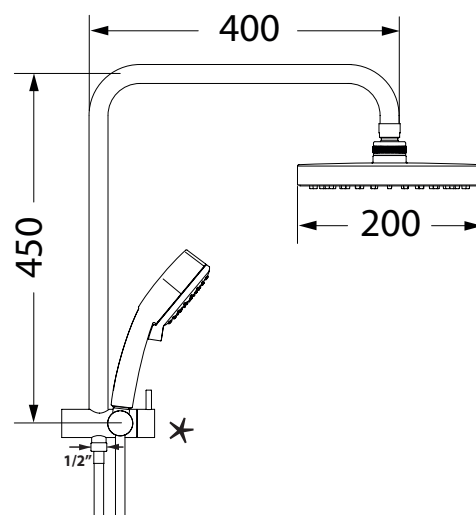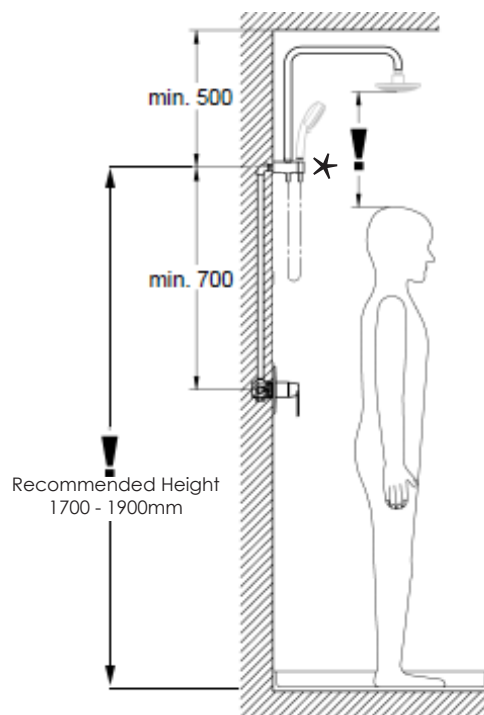

★ Water Entry Point

WMKT21163
ASNZ 3662



Please direct any feedback for this product to Customer Central:
support@customer-central.com.au
or call 1300 364 748