


ARGENT SHOWER / BATH MIXERS

NOTES PRIOR TO INSTALLATION

1. INSPECT ALL PARTS PRIOR TO INSTALLATION FOR SUITABILITY AND/ OR DEFECTS
2. ANY SUSPECTED DEFECT SHOULD BE REPORTED AS SOON AS POSSIBLE
3. SHOULD ANY PRODUCT BE INSTALLED, DESPITE A FAULT HAVING BEEN FOUND AND REPORTED, ARGENT WILL NOT ACCEPT LIABILITY FOR THE COST OF LABOUR TO REMOVE AND INSTALL ANY REPLACEMENT PRODUCT/S

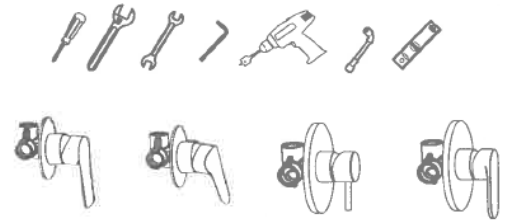

NOTES FOR INSTALLATION

1. Please ensure pipework is clear of debris by flushing lines prior to installation of the mixer body.




PRESSURE AND TEMPERATURE REQUIREMENTS

1. Inlet pressure range 100 – 500kpa
2. Maximum hot water temperature 60 C
3. AS/NZS 3500 requires 500 kPa maximum operating pressure at any outlet within a building
4. Hot & Cold inlets should have equalised water pressures.

Please direct any feedback for this product to Customer Central:
support@customer-central.com.au or call 1300 364 748


STEP 1

- Based on the size of the body and the wall type, either secure it to the noggins or embed it into the wall at an approximate height of 1100mm.
- Ensure that the body is installed level, plumb and square.

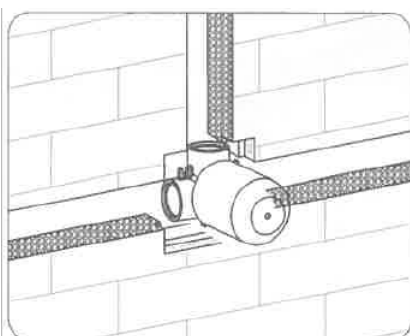


STEP 2

- Connect the hot (LHS) and cold (RHS) supply and the mixed water pipe using applicable sealing practices. Remove the plastic tiling template and test for water security with the mixer in both open and shut positions, replace the template.

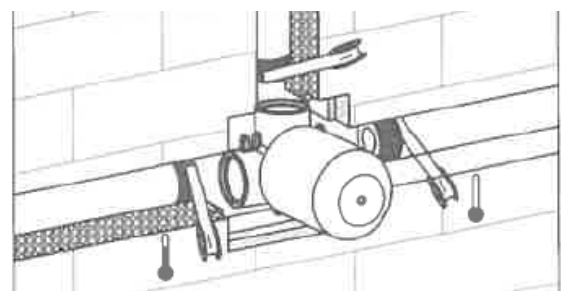


ARGENT SHOWER / BATH MIXERS
STEP 3


- Either, sheet around the mixer body with fibre cement sheeting or backfill the exposed channels ready for tiling.

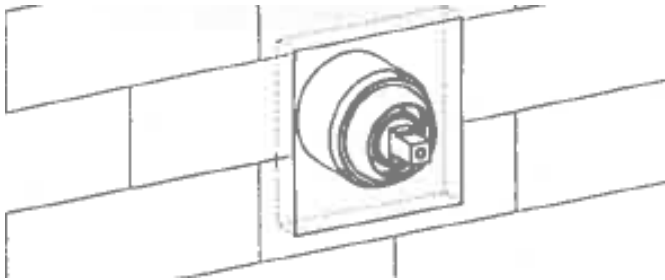
STEP 4

- Ensure tiles are cut as close to the plastic template covering the mixer dome as possible; remove the plastic template after the tiling is completed.

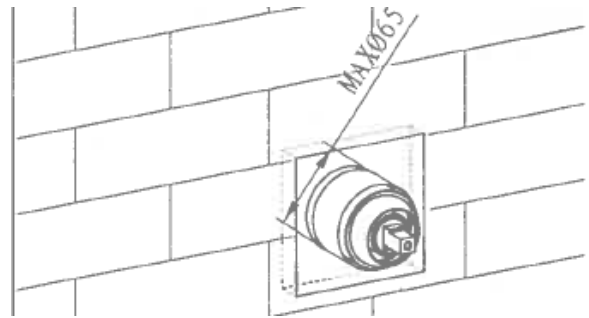
STEP 5

- Install the trim cover plate over the dome.

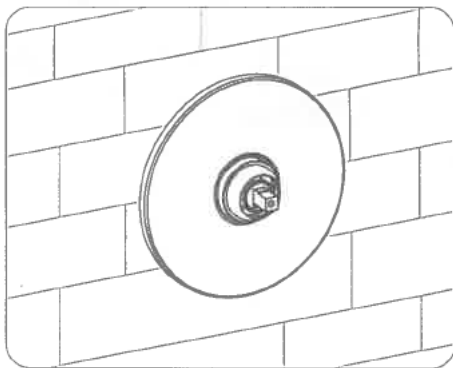
STEP 6

- Install the lever securing it with the grub screw provided.


NOTES TO THE INSTALLER

- INSPECT ALL PARTS PRIOR TO INSTALLATION FOR SUITABILITY AND/ OR DEFECTS
- SHOULD ANY PRODUCT BE INSTALLED, DESPITE A FAULT HAVING BEEN FOUND AND REPORTED, ARGENT WILL NOT ACCEPT LIABILITY FOR THE COST OF LABOUR TO REMOVE AND INSTALL ANY REPLACEMENT PRODUCT/S

CLEANING AND MAINTENANCE

- THE SPECIAL CHROME FINISH ONLY REQUIRES CLEANING WITH MILD HOUSEHOLD DETERGENT AND DRY WITH A CLEAN COTTON CLOTH TO RETAIN ITS LUSTROUS SHINE.
- AVOID CLEANING WITH ABRASIVE MATERIALS OR CLEANERS