

EMBRACE 110 ADJUSTABLE HOOK & UNION SET

NOTES PRIOR TO INSTALLATION

1. INSPECT ALL PARTS PRIOR TO INSTALLATION FOR SUITABILITY AND/ OR DEFECTS
2. ANY SUSPECTED DEFECT SHOULD BE REPORTED AS SOON AS POSSIBLE
3. SHOULD ANY PRODUCT BE INSTALLED DESPITE A FAULT HAVING BEEN FOUND AND REPORTED, ARGENT WILL NOT ACCEPT LIABILITY FOR THE COST OF LABOUR TO REMOVE AND INSTALL ANY REPLACEMENT PRODUCT/S

PRESSURE AND TEMPERATURE REQUIREMENTS


1. Inlet pressure range 100 – 500kpa
2. Maximum hot water temperature 60 C
3. AS/NZS 3500 requires 500 kPa maximum operating pressure at any outlet within a building
4. Shower is suitable for mains pressure application and is not suitable for use with low or unequal pressure.
5. Shower may not be suitable for instantaneous water heaters, tempering valve and thermostatic mixing valves.

COMPONENT CHECK LIST

1. Adjustable Hook & Union
2. 1500mm Shower hose
3. Three Function handpiece

INSTALLATION

1. Attach adjustable Hook & Union to water entry point
2. Connect the hand piece and hose to the adjustable Hook & Union Set.
3. Clean any packaging or installation debris from the site

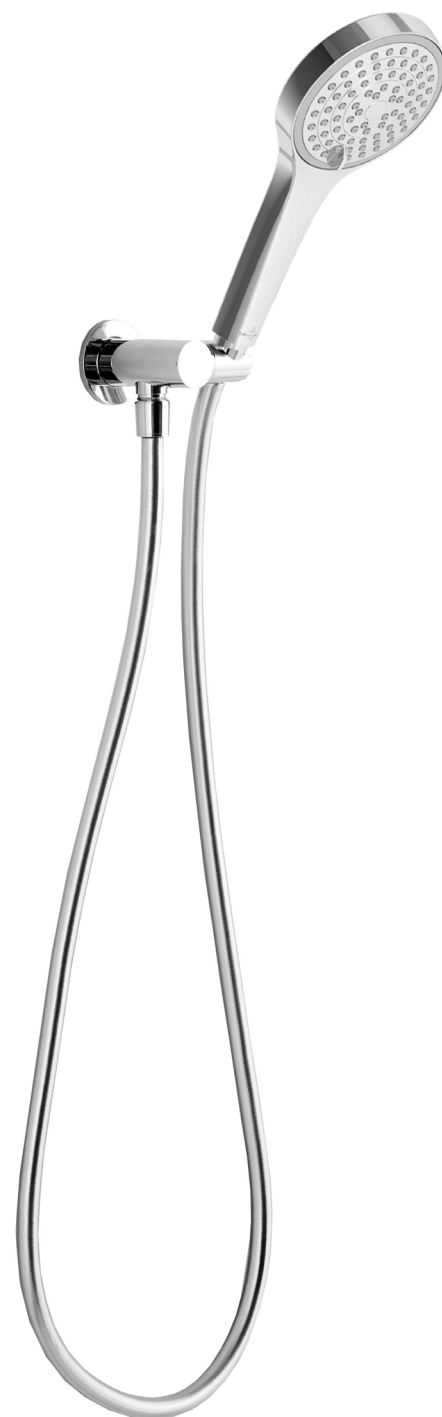

Please direct any feedback for this product
to Customer Central:
support@customer-central.com.au
or call 1300 364 748

