








# Installation

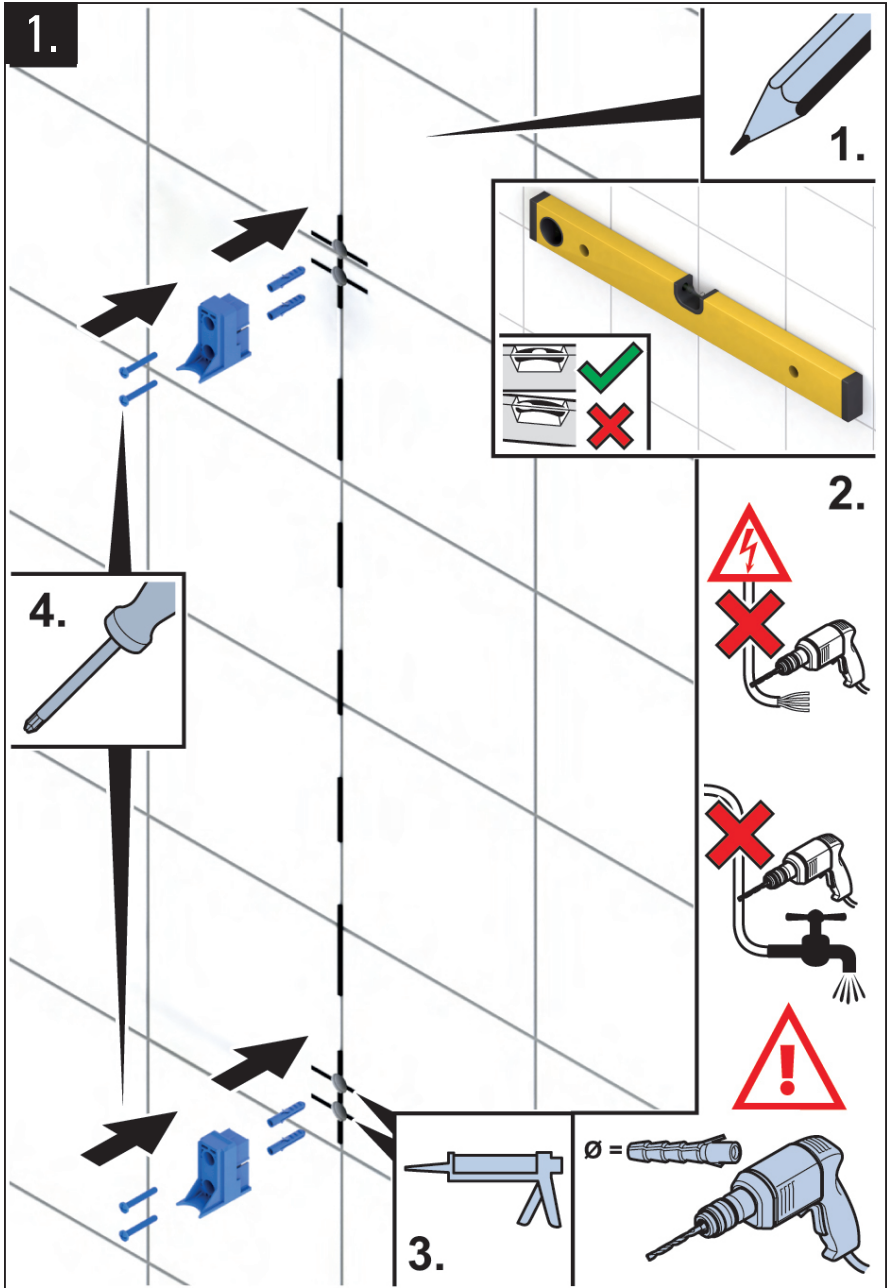

# Installation

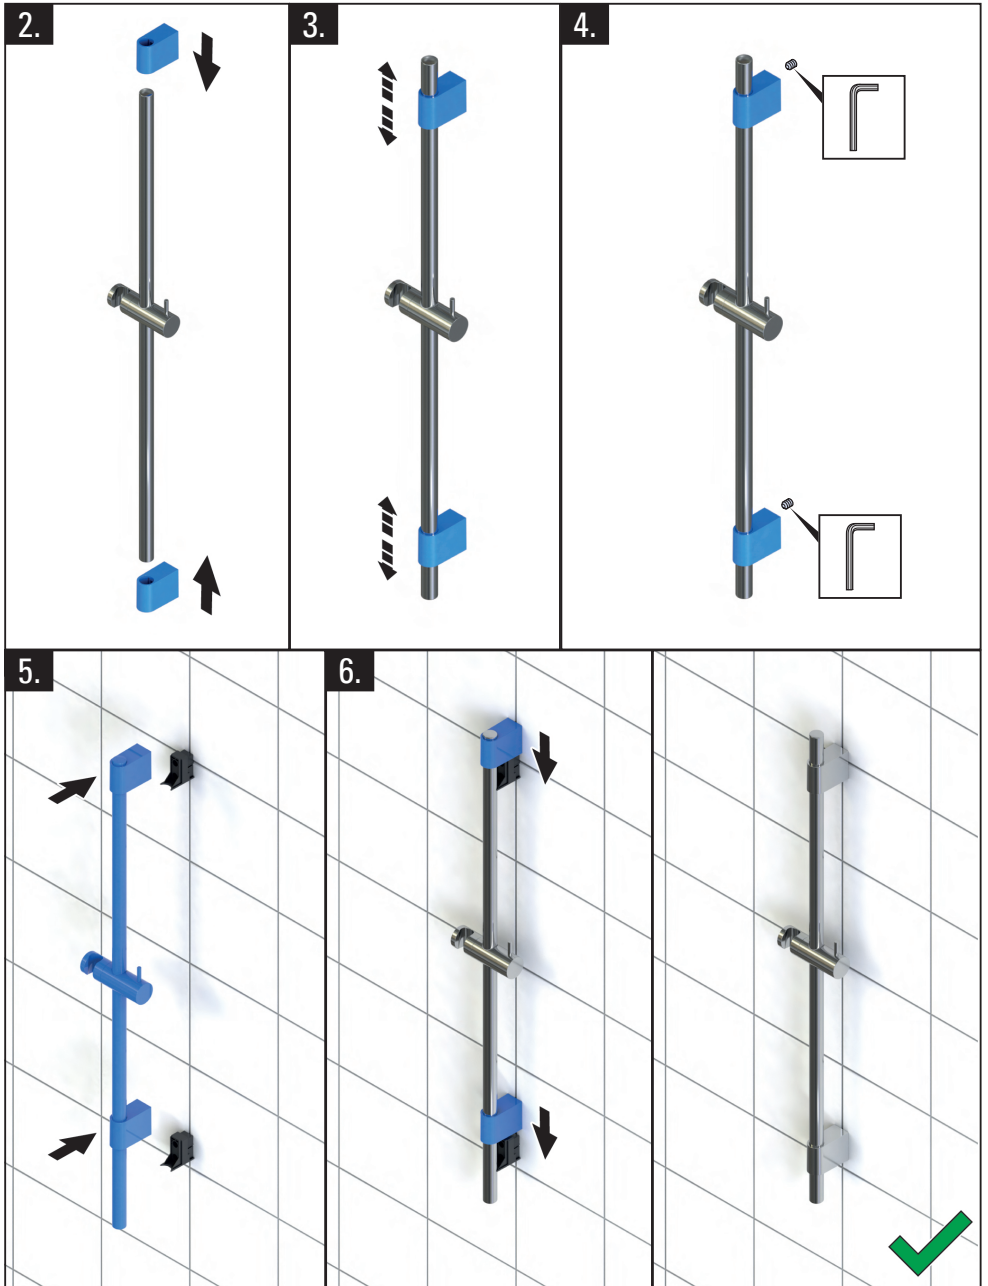

# Cleaning and Care

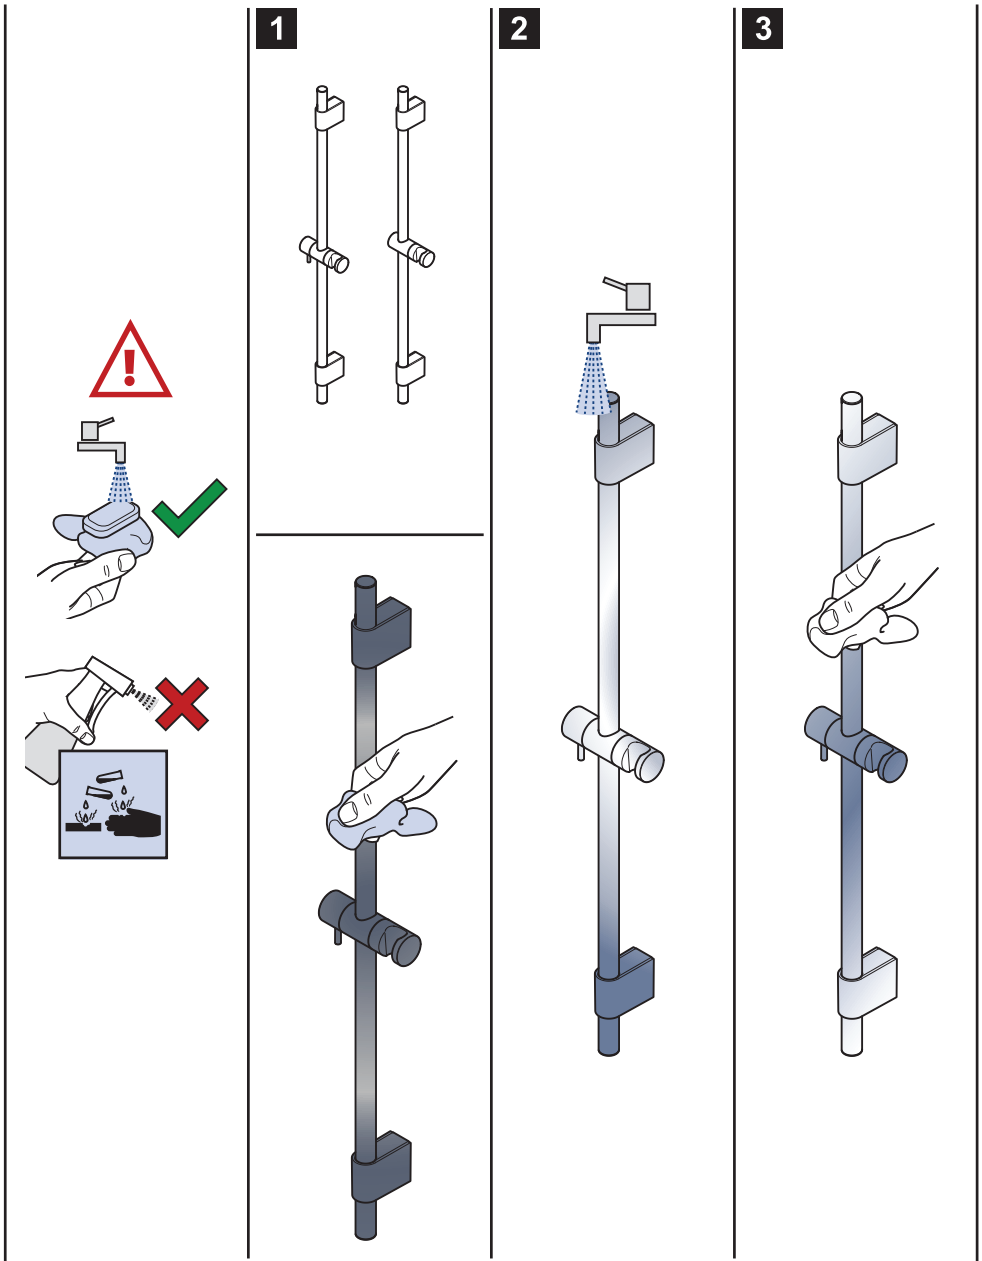



WMKT21163  
AS/NZS 3662  
SAI Global

### IMPORTANT

1. Inlet pressure range 100 - 500 kPa.
2. Maximum hot water temperature 60 °C.
3. AS/NZS 3500 requires 500 kPa maximum operating pressure at any outlet within a building.
4. Shower is suitable for use for mains pressure application and is not suitable for use with low or unequal pressure.
5. Shower may not be suitable for instantaneous water heaters, tempering valve and thermostatic mixing valves.



Argent Australia  
L1/22 Arthur Street, Foritudo Valley QLD 4006  
1300 364 748  
[www.argentaust.com.au](http://www.argentaust.com.au)



Villeroy & Boch AG  
Postfach 12 30-66689 Mettlach, Germany  
Tel: +49 (0) 6864816000  
[www.villeroy-boch.com](http://www.villeroy-boch.com)

Please Direct any feedback for this product to Customer Central:  
[support@customer-central.com.au](mailto:support@customer-central.com.au) or call 1300 364 748

The manufacturer reserves the right to make alterations without notice.